


Interconnected Deadbolts

Specifications

Door Preparation:	2X Cross bore 2-1/8", 2X edge bore 1", 2X 1" x 2-1/4" latch mortises, backset 2-3/8" or 2-3/4"
Backset:	Adjustable for 2-3/8" or 2-3/4"
Door Thickness:	1-3/8" to 1-3/4"
Cylinder:	Soild brass KW1, 5 pin, SC1 available
Strikes:	2-3/4" x 1-1/8" square corner and 2-1/4" round corner full lip
Chassis:	Tubular (lever portion)
Latch:	1" Throw, steel
Fire Rating:	3 Hour UL rated
ANSI Grade:	Meets Grade 2 Standards
Center to Center:	5-1/2"
Deadbolt Keying:	KD or as specified, master key, construction key available
Outside Trim:	Lever with return


Style	A(in)	B(in)	C(in)	D(in)	E(in)	F(in)	G(in)	H(in)	I(in)
Alwood	8.58	2.75	5.50	2.56	3.00	5.00	4.10	2.50	2.95
Harper	8.58	2.75	5.50	2.56	3.00	5.00	4.21	2.50	2.70
Anna	8.58	2.75	5.50	2.56	3.00	5.00	4.25	2.50	2.64

Dimensions

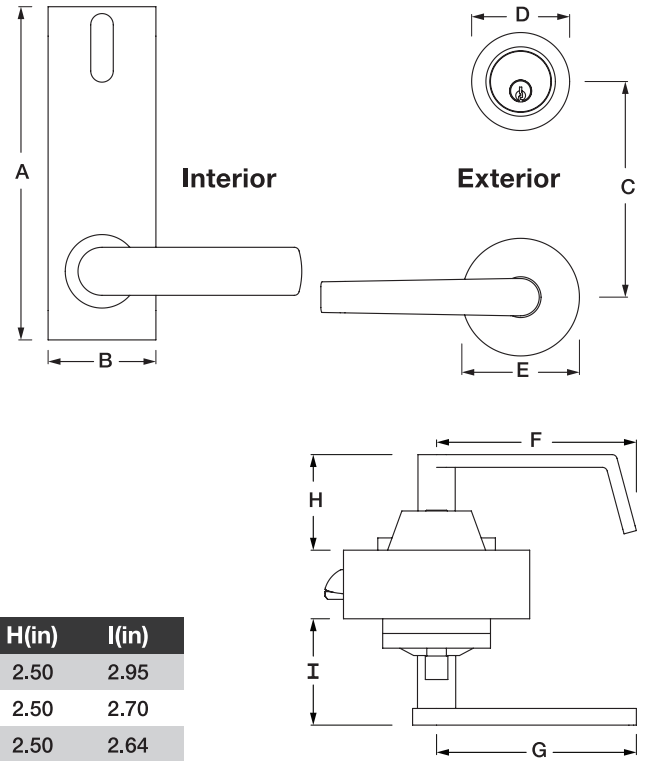


Finshes	Polished Brass (105)	Satin Nickel (119)	Polished Chrome (125)	Tuscan Bronze® (150)
Alwood		•		•
Harper		•		•
Anna		•	•	

Functions

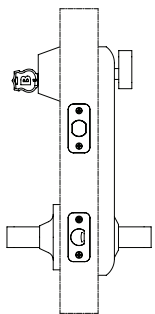

Entry Single Locking

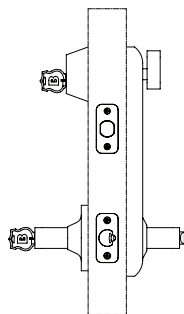

Entry Double Locking

Finishes



Satin Nickel
Harper

Tuscan Bronze®
Alwood